

ENGEL

portable fridge-freezers

A LEGEND IN RELIABILITY

MT27F



TECHNICAL SPECIFICATION SHEET

FEATURES:

100% CFC Free

Thermostat Controlled

Energy Efficient Sawafuji Swing Motor

Low DC Current Draw: 12V 2.5 Amps

Automatic Voltage Selection AC / DC

Generator & Solar Panel Compatible

Strong Construction

Compact & Lightweight

Noise Level: 32dB

Polypropylene Cabinet


Polyurethane Insulation

Carry Handles

3 Year Manufacturers Warranty

SPECIFICATIONS:

Storage Volume:	Litres	21 Litres (29 x 375mm Cans)
Exterior Dimensions:	H x W x D	450mm x 538mm x 306mm
Interior Dimensions:	H x W x D	320mm x 290mm x 200mm
Exterior Finish:	Door	A.B.S. Resin
	Cabinet	Polypropylene
Interior Finish:	Door	A.B.S. Resin
	Cabinet	A.B.S. Resin
Insulation:		Polyurethane (C.F.C. Free)
Input Voltage:	AC	AC 185 ~ 264V, 50/60Hz
	DC	DC 10.5 ~ 32V
Rated Amperage:	AC	AC 0.35A
	DC	DC 12V 2.5A, 24V 1.3A
Compressor Rating:		AC 13 ~ 16V, 50Hz, 33W
Refrigerant:		Tetrafluoroethane (R-134a)
Weight:		18kg

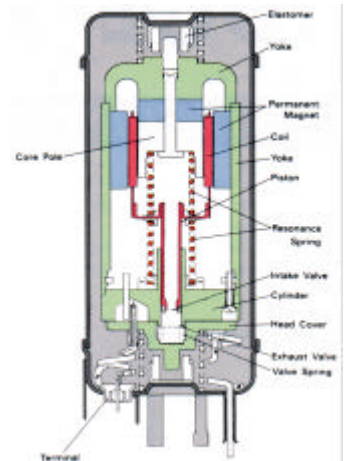

Sawafuji Swing Motor

ACCESSORIES:

Slide-lok - TSL27



Transit Bag
- TBAG27G




Fridge Slide - 515SLIDE or 525SLIDE

Transit Base - TB525WP



Separator Frame - 515BSF

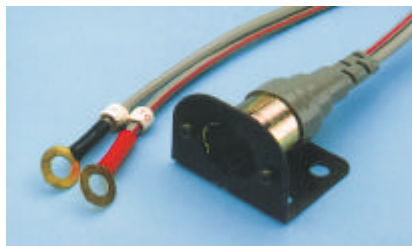

12 Volt Panel - APAN/ASPAN/BPAN