

ENGEL

portable fridge-freezers

A LEGEND IN RELIABILITY



MT77F




TECHNICAL SPECIFICATION SHEET

FEATURES:

- 100% CFC Free
- Generator & Solar Panel Compatible
- Polyurethane Insulation
- Thermostat Controlled
- Strong Construction
- Carry Handles
- Energy Efficient Sawafuji Swing Motor
- Compact & Lightweight
- 3 Year Manufacturers Warranty
- Low DC Current Draw: 12V 2.5 Amps
- Noise Level: 32dB
- Automatic Voltage Selection AC / DC
- Polypropylene Cabinet

SPECIFICATIONS:

Storage Volume:	Litres	15 Litres (21 x 375mm Cans)
Exterior Dimensions:	H x W x D	358mm x 548mm x 306mm
Interior Dimensions:	H x W x D	230mm x 290mm x 200mm
Exterior Finish:	Door	A.B.S. Resin
	Cabinet	Polypropylene
Interior Finish:	Door	A.B.S. Resin
	Cabinet	
Insulation:		Polyurethane (C.F.C. Free)
Input Voltage:	AC	AC 185 ~ 264V, 50/60Hz
	DC	DC 10.5 ~ 32V
Rated Amperage:	AC	AC 0.35A
	DC	DC 12V 2.5A, 24V 1.3A
Compressor Rating:		AC 13 ~ 16V, 50Hz, 33W
Refrigerant:		Tetrafluoroethane (R-134a)
Weight:		17kg

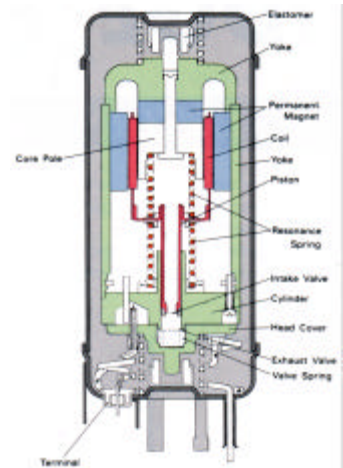

Sawafuji Swing Motor

ACCESSORIES:

Slide-lok - TSL515



Fridge Slide - 515SLIDE

Separator Frame - 515BSF



Transit Base - TB515WP



Transit Bag - TBAG17G



12 Volt Panel - APAN/ASPAN/BPAN